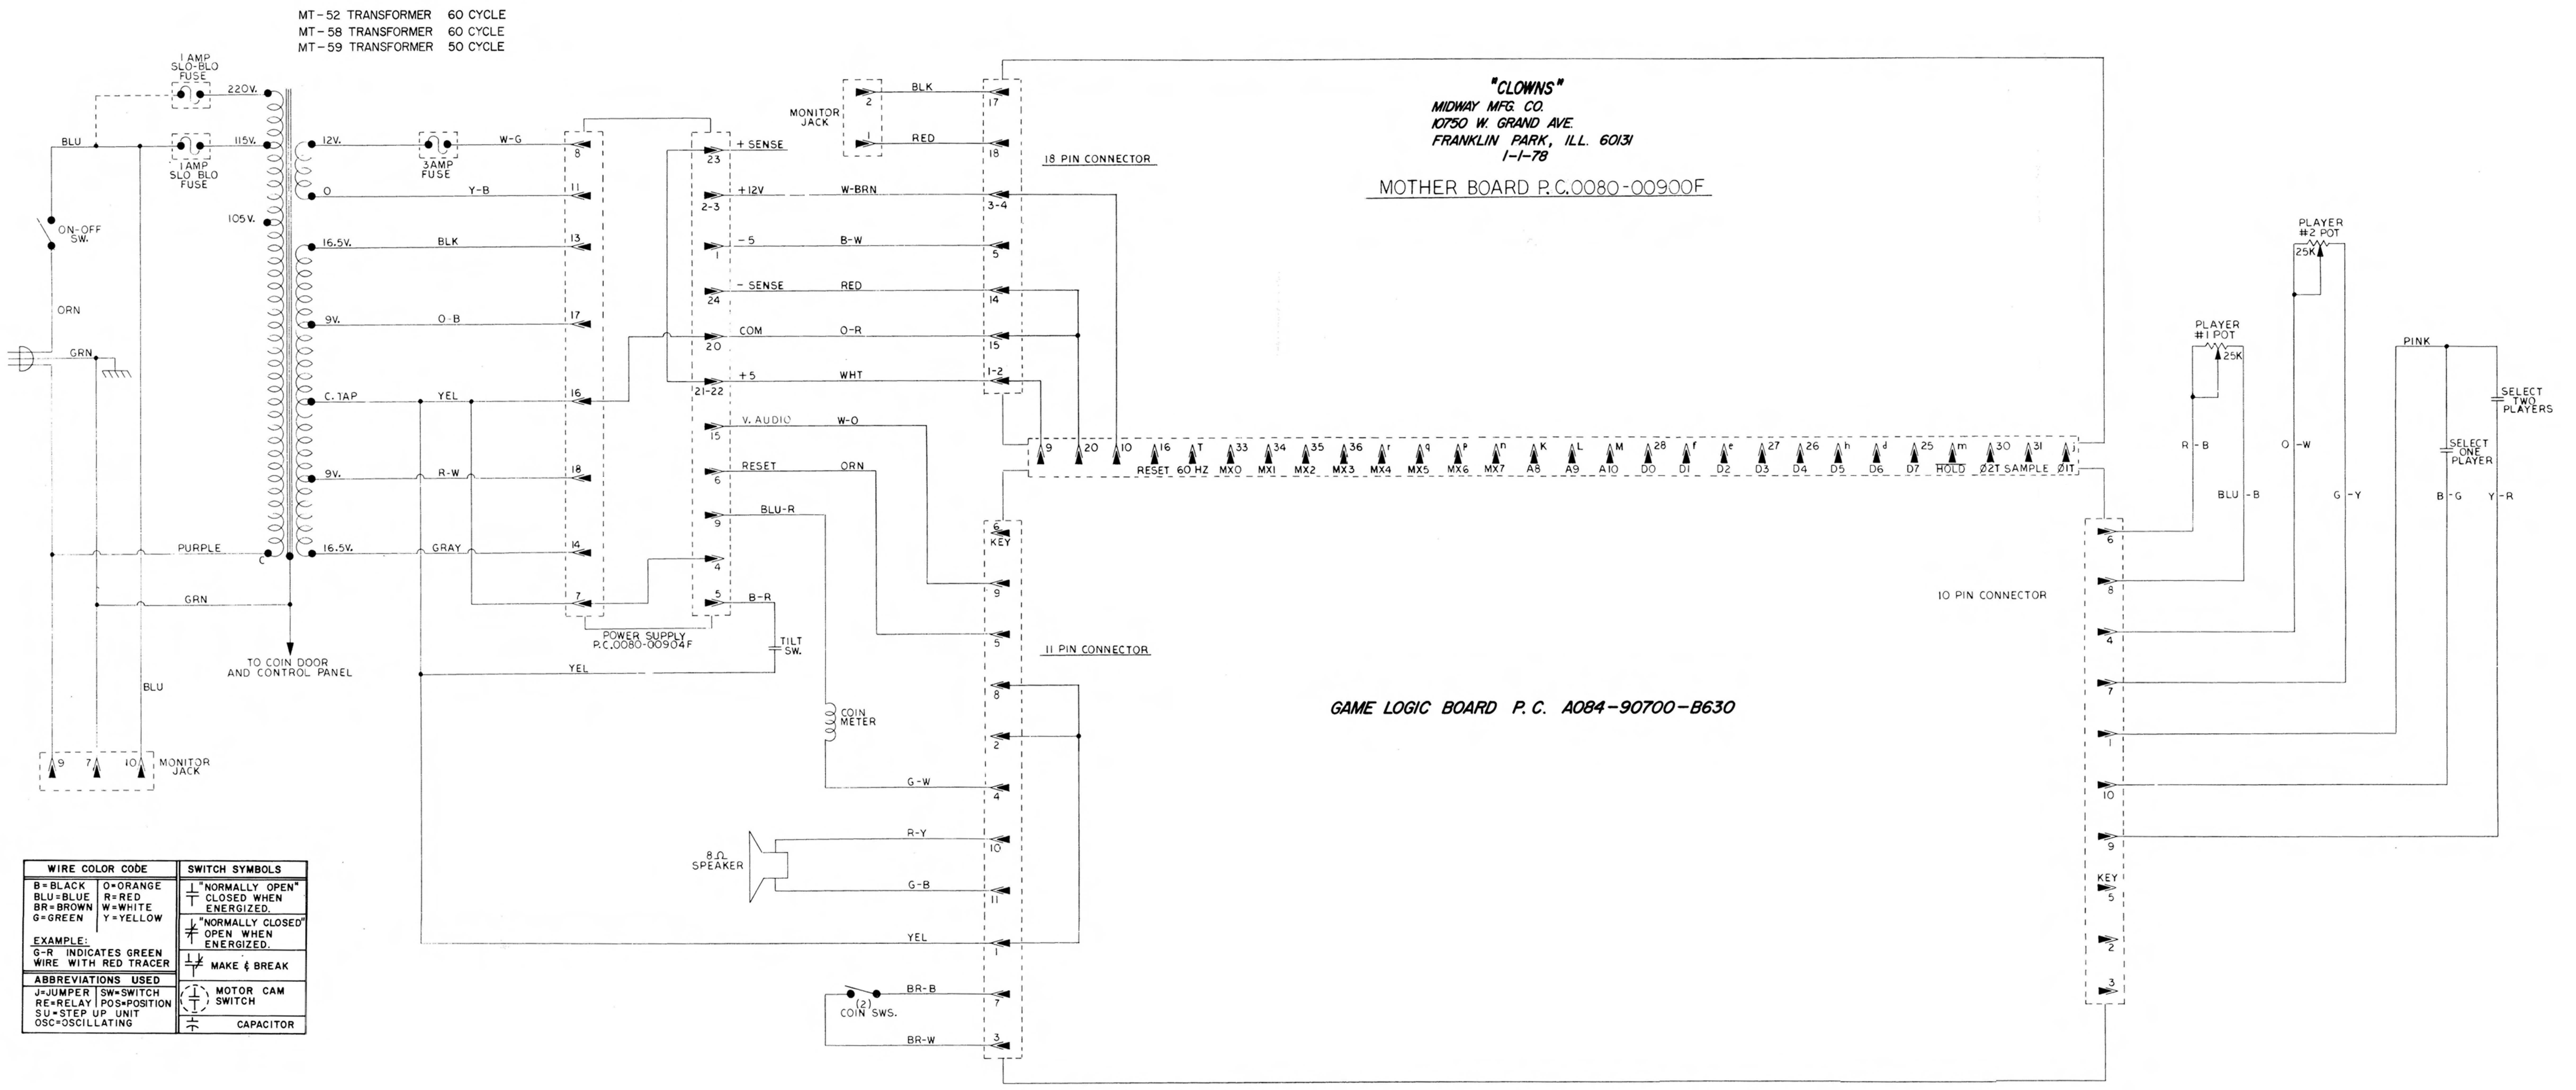


MT-52 TRANSFORMER 60 CYCLE
MT-58 TRANSFORMER 60 CYCLE
MT-59 TRANSFORMER 50 CYCLE
"CLOWNS"
MIDWAY MFG. CO.
10750 W. GRAND AVE.
FRANKLIN PARK, ILL. 60131
1-1-78
MOTHER BOARD P.C.0080-00900F
GAME LOGIC BOARD P.C. A084-90700-B630
1 AMP SLO-BLO FUSE
220V.
115V.
105V.
BLU
ON-OFF SW.
ORN
GRN
PURPLE
12V.
0
16.5V.
9V.
C.TAP
9V.
16.5V.
3AMP FUSE
W-G
Y-B
BLK
O-B
YEL
R-W
GRAY
TO COIN DOOR AND CONTROL PANEL
POWER SUPPLY P.C.0080-00904F
+ SENSE
+12V
-5
- SENSE
COM
+5
V. AUDIO
RESET
BLU-R
B-R
W-BRN
B-W
RED
O-R
WHT
W-O
ORN
TILT SW.
YEL
COIN METER
G-W
R-Y
G-B
8 Ω SPEAKER
BR-B
BR-W
(2) COIN SWS.
MONITOR JACK
18 PIN CONNECTOR
11 PIN CONNECTOR
10 PIN CONNECTOR
KEY
RESET 60 HZ MX0 MX1 MX2 MX3 MX4 MX5 MX6 MX7 A8 A9 A10 D0 D1 D2 D3 D4 D5 D6 D7 HOLD Ø2T SAMPLE Ø1T
PLAYER #1 POT 25K
PLAYER #2 POT 25K
R-B
BLU-B
O-W
G-Y
PINK
SELECT TWO PLAYERS
SELECT ONE PLAYER
B-G
Y-R
WIRE COLOR CODE
B=BLACK O=ORANGE
BLU=BLUE R=RED
BR=BROWN W=WHITE
G=GREEN Y=YELLOW
EXAMPLE:
G-R INDICATES GREEN WIRE WITH RED TRACER
ABBREVIATIONS USED
J=JUMPER SW=SWITCH
RE=RELAY POS=POSITION
SU=STEP UP UNIT
OSC=OSCILLATING
SWITCH SYMBOLS
"NORMALLY OPEN" CLOSED WHEN ENERGIZED.
"NORMALLY CLOSED" OPEN WHEN ENERGIZED.
MAKE & BREAK
MOTOR CAM SWITCH
CAPACITOR